

YII 1 for PHP Development



JUNNEL T. TORATE
Software Developer

Objectives

- Basic understanding of the structure, concepts, and help to promote rapid application development (RAD), which saves time, helps build more stable applications, and reduces the amount of repetitive coding for developers.
- Take away performing tedious coding tasks using pre-built modules and spend time on developing the actual application rather than re-building the foundation.
- Awareness of using modern PHP frameworks to improve knowledge and skills to easily adapt other frameworks more flexible.



Course Outline

- Introduction to PHP: The PHP Environment, Software and Frameworks
- PHP Programming with Yii 1
- Web UI using Bootstrap
- Database Connection
- Generating Code with Gii
- Git: Clone, Add, Commit and Push
- Exercise: Develop Web Application



Introduction

PHP (Hypertext Preprocessor)

- Server-side scripting language
- Used to manage dynamic content, databases, session tracking, even build entire e-commerce sites
- Performs system functions like create, open, read and write files
- Handle pages to view, add, edit and delete data from the database

```
<html>
  <head>
    <title>Hello World</title>
  </head>
  <body>

    <?php echo "Hello, World!"; ?>

  </body>
</html>
```

Result:

Hello, World!


Web Server

- The basic objective of the web server is to store, process and deliver web pages to the users.
- Intercommunication is done through **Hypertext Transfer Protocol** (HTTP)



Microsoft IIS

- **Internet Information Services**
- IIS is a web server software package designed for Windows.
- It is used for hosting websites and other content on the Web.

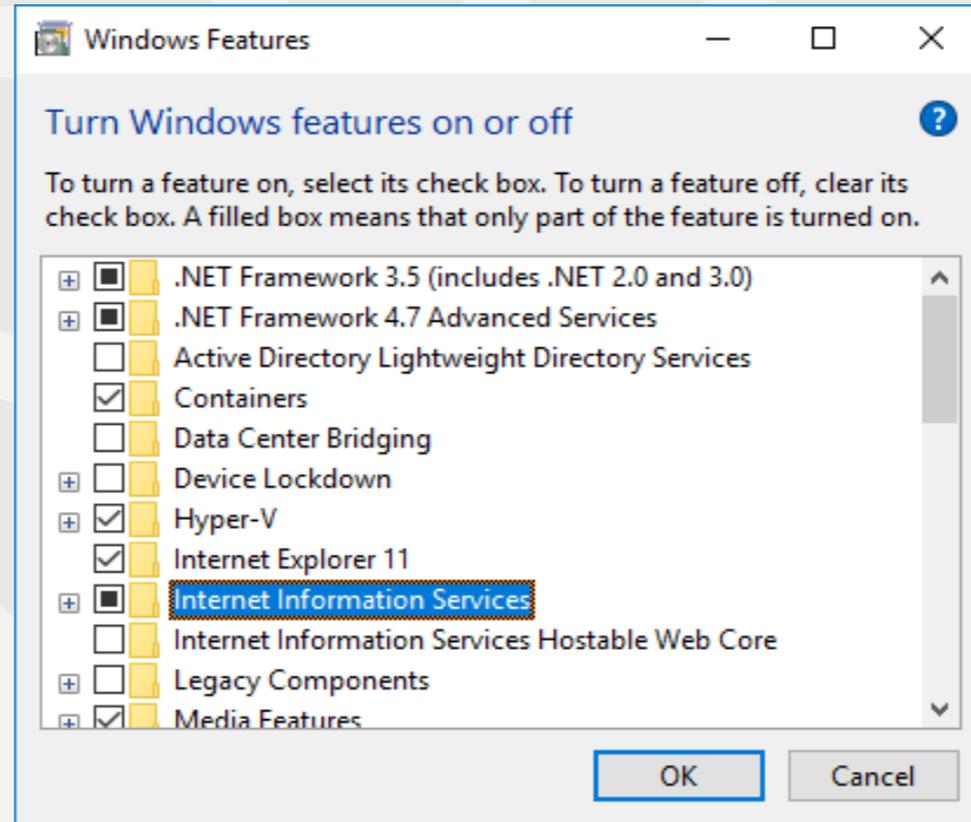

IIS Web Server: Internet Information Services

The screenshot displays the Internet Information Services (IIS) Manager application window. The title bar reads "Internet Information Services (IIS) Manager". The address bar shows the local computer name "LAPTOP-OFEHG4F7". The main area is titled "LAPTOP-OFEHG4F7 Home" and contains a grid of configuration icons. The icons are organized into sections: "ASP.NET" (including .NET Authorizat..., .NET Compilation, .NET Error Pages, .NET Globalization, .NET Trust Levels, Application Settings, and Connection Strings) and "FTP" (including FTP Authenticat..., FTP Authorizat..., FTP Directory Browsing, FTP Firewall Support, FTP IP Address a..., FTP Logging, and FTP Logon Attempt R...). A "Connections" pane on the left shows the local computer selected. On the right, an "Actions" pane lists tasks such as "Manage Server", "Restart", "Start", "Stop", "View Application Pools", "View Sites", "Deploy", "Export Server Package...", "Import Server or Site Package...", "Change .NET Framework Version", "Get New Web Platform Components", and "Help". At the bottom, there are tabs for "Features View" and "Content View". The status bar at the bottom left indicates "Ready".

Internet Information Services (IIS) Manager

LAPTOP-OFEHG4F7

File View Help

Connections

LAPTOP-OFEHG4F7 (LAPTOP)

LAPTOP-OFEHG4F7 Home

Filter: Go Show All Group by: Area

ASP.NET

- .NET Authorizat...
- .NET Compilation
- .NET Error Pages
- .NET Globalization
- .NET Trust Levels
- Application Settings
- Connection Strings

Machine Key Pages and Controls Providers Session State SMTP E-mail

FTP

- FTP Authenticat...
- FTP Authorizat...
- FTP Directory Browsing
- FTP Firewall Support
- FTP IP Address a...
- FTP Logging
- FTP Logon Attempt R...

Features View Content View

Ready

Actions

Manage Server


- Restart
- Start
- Stop
- View Application Pools
- View Sites

Deploy

- Export Server Package...
- Import Server or Site Package...
- Change .NET Framework Version
- Get New Web Platform Components
- Help

Zend Server

- **Zend Server** is a complete and certified PHP distribution stack fully maintained and supported by Zend Technologies.
- It includes over 80 PHP extensions and supports Apache, NGINX and IIS Web servers.

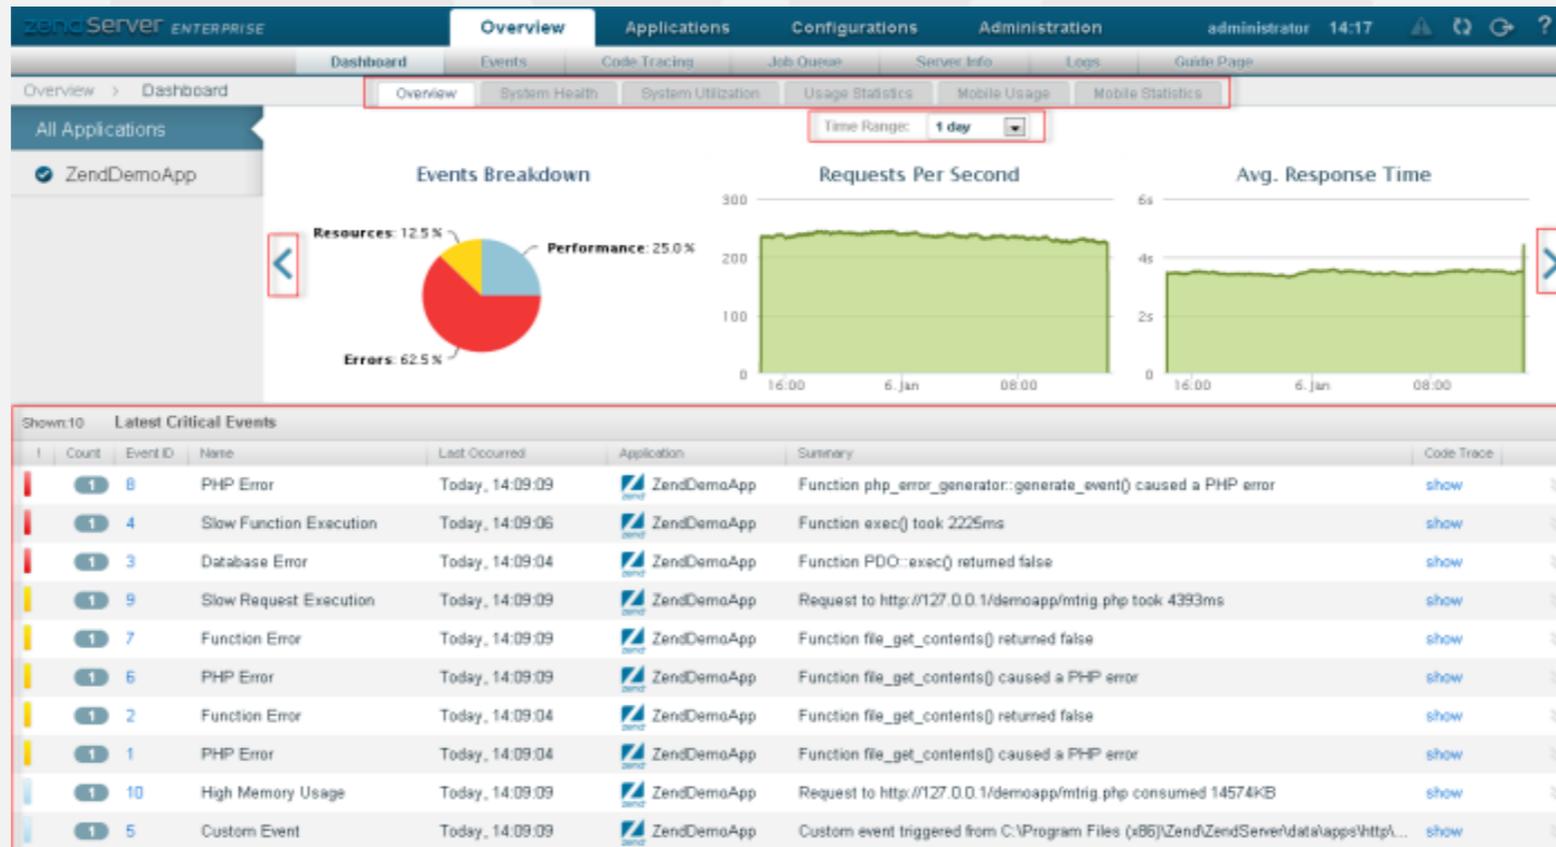

Code Editors and IDE

Code Editor


- Small piece of software like a text editor.
- It highlights special keywords, give suggestions, automatic indentation features and other has a integrated terminal.

IDE (Integrated Development Environment)

- Has more sophisticated complex functionalities to make the developer life more easy.
- It supports debugging, build automation tools, Git plug-ins, code generators, managing project history and etc.

Sublime Text

- **Sublime Text** is a fast and lightweight cross-platform code editor packed with features and plug-ins.
- With its **“Goto Anything”** keyboard shortcut, you can easily jump to any symbol or line of code within your program.

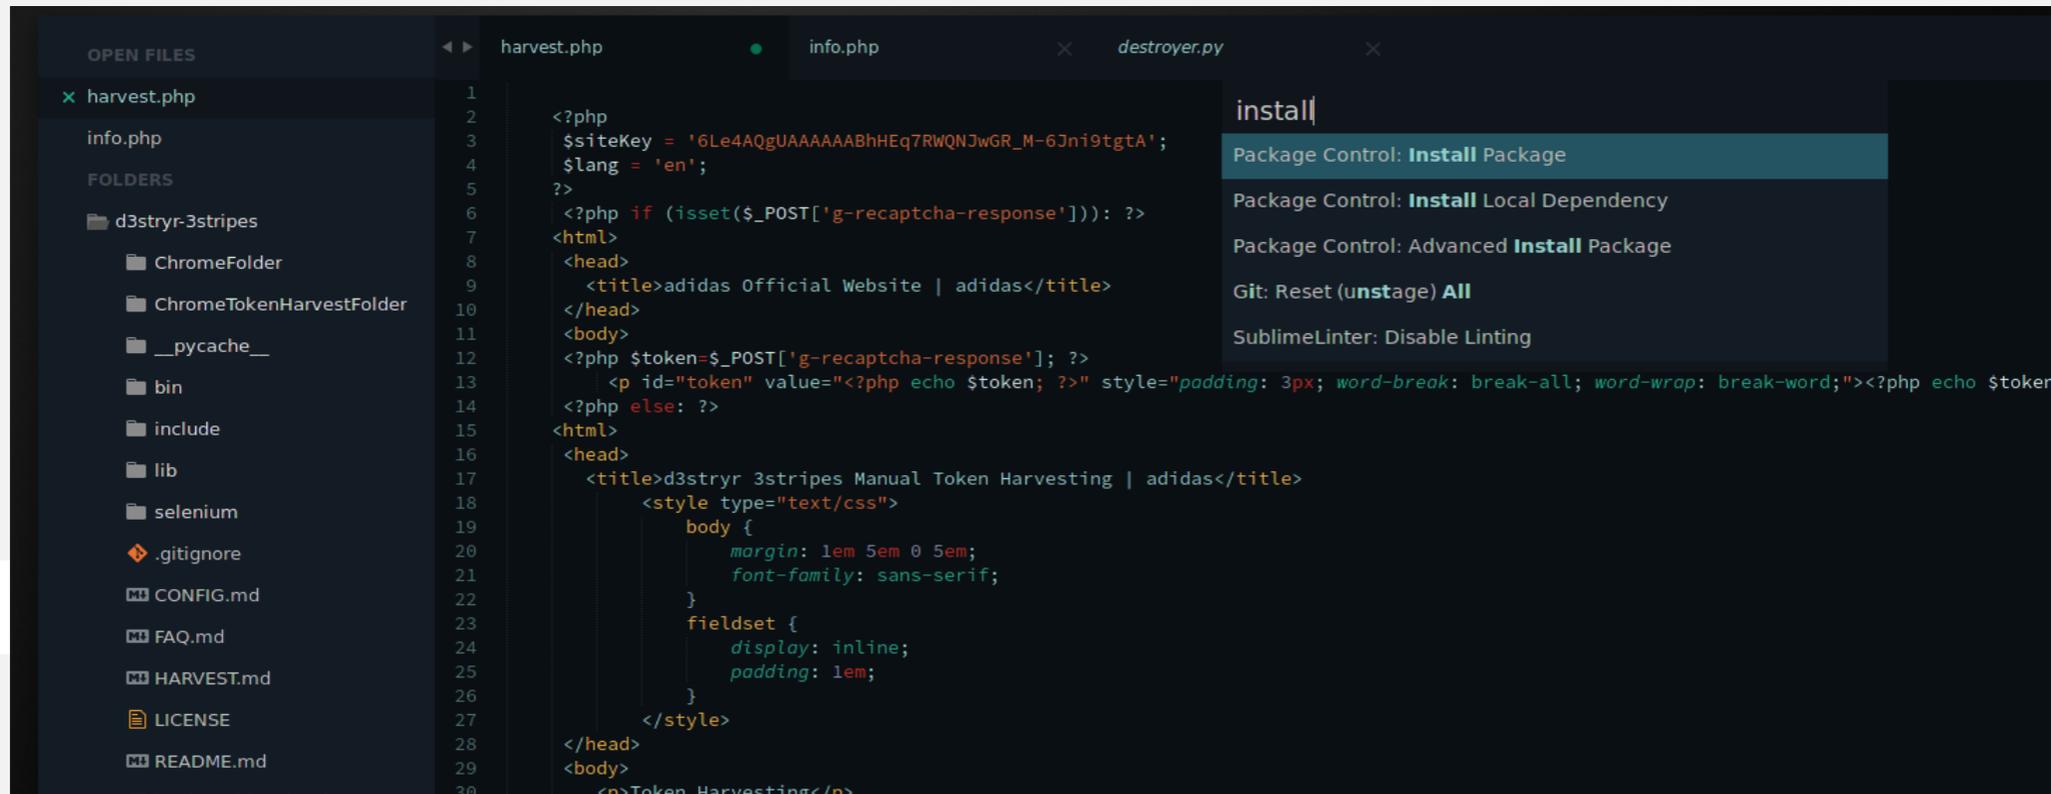

The screenshot shows the Sublime Text editor interface. On the left is a sidebar with 'OPEN FILES' and 'FOLDERS'. The main editor area displays code from 'harvest.php'. A search overlay is visible on the right side of the editor.

```
1
2
3 <?php
4 $siteKey = '6Le4AQgUAAAAABhHEq7RWQNJwGR_M-6Jni9tgtA';
5 $lang = 'en';
6 ?>
7
8 <?php if (isset($_POST['g-recaptcha-response'])): ?>
9 <html>
10 <head>
11 <title>adidas Official Website | adidas</title>
12 </head>
13 <body>
14 <?php $token=$_POST['g-recaptcha-response']; ?>
15 <p id="token" value="<?php echo $token; ?>" style="padding: 3px; word-break: break-all; word-wrap: break-word;"><?php echo $token
16 <?php else: ?>
17 <html>
18 <head>
19 <title>d3stryr 3stripes Manual Token Harvesting | adidas</title>
20 <style type="text/css">
21 <body {
22 <body {
23 <body {
24 <body {
25 <body {
26 <body {
27 <body {
28 <body {
29 <body {
30 <body {
```

install
Package Control: Install Package
Package Control: Install Local Dependency
Package Control: Advanced Install Package
Git: Reset (unstage) All
SublimeLinter: Disable Linting

PHP Frameworks

Disadvantages

- Programmers need to learn PHP frameworks instead of PHP Basics
- Quality of PHP frameworks differs
- Lack of option to modify core behavior
- Affect speed and performance of websites



Yii Framework

- **Yii** is an open source, object-oriented, component-based MVC PHP web application framework.
- Pronounced as **“Yee”** and in Chinese it means **“simple and evolutionary”** and it can be an acronym for **“Yes It Is!”**.
- Light-weight and equipped with caching mechanisms, suited for high-traffic applications, such as portals, forums, content management systems (CMS), e-commerce systems, etc.

Yii 1.1 Installation

- Download Yii Framework from this [link](#).
- Unpack the Yii release file to a Web-accessible directory.

Requirements:

After installing Yii, to verify that your server satisfies Yii's requirements, you can do so by accessing the **requirement checker** script via the following URL in a Web browser: <http://hostname/path/to/yii/requirements/index.php>

e.g. <http://localhost/yii-app/yii/requirements/index.php>

Creating Your First Yii Application

- Using **yiic** (command line tool) to create a new Yii application
- Assume that **YiiRoot** is the directory where Yii is installed, and **WebRoot** is the document root of our Web server

Run **yiic** on the command line as follows:

```
% YiiRoot/framework/yiic webapp WebRoot/yii-app
```

```
C:\WINDOWS\system32\cmd.exe  
  
C:\>C:\inetpub\wwwroot\yii-app\yii\framework\yiic webapp C:\inetpub\wwwroot\yii-app
```

Creating Your First Yii Application

- This will create a skeleton Yii application under the directory WebRoot/yii-app

```
Your application has been created successfully under C:\inetpub\wwwroot\yii-app.
```

By accessing the following URL in a Web browser:

<http://localhost/yii-app/index.php>

The application has four default pages: the homepage, the about page, the contact page and the login page.

The contact page displays a contact form that users can fill in to submit their inquiries to the webmaster, and the login page allows users to be authenticated before accessing privileged contents.

Database Connection

- WebRoot/yii-app/protected/config/database.php

```
// This is the database connection configuration.
return array(
    'connectionString' => 'sqlite:'.dirname(__FILE__).'/../data/testdrive.db',
    // uncomment the following lines to use a MySQL database
    /*
    'connectionString' => 'mysql:host=localhost;dbname=testdrive',
    'emulatePrepare' => true,
    'username' => 'root',
    'password' => '',
    'charset' => 'utf8',
    */
);
```

- The above code is the default database connection
- Instructs Yii that the application should connect to the SQLite database:

<WebRoot/yii-app/protected/data/testdrive.db>

Connecting to MySQL Database

- In MySQL GUI, create a database named: **testdrive**
- Select that database and execute the SQL file found in this directory:
[WebRoot/yii-app/protected/data/schema.mysql.sql](#)

The SQL schema contains only a single table named **tbl_user** with the initial data to be inserted.

```
CREATE TABLE tbl_user (  
    id INTEGER NOT NULL PRIMARY KEY AUTO_INCREMENT,  
    username VARCHAR(128) NOT NULL,  
    password VARCHAR(128) NOT NULL,  
    email VARCHAR(128) NOT NULL  
);  
  
INSERT INTO tbl_user (username, password, email) VALUES ('test1', 'pass1', 'test1@example.com');  
INSERT INTO tbl_user (username, password, email) VALUES ('test2', 'pass2', 'test2@example.com');  
INSERT INTO tbl_user (username, password, email) VALUES ('test3', 'pass3', 'test3@example.com');  
.....
```

Connecting to MySQL Database

- Edit the file: [WebRoot/yii-app/protected/config/database.php](#)
- In editor, comment the following line of code:

```
return array(  
    'connectionString' => 'sqlite:'.dirname(__FILE__).'/../data/testdrive.db',  
    .....  
);
```

- Uncomment the following lines of code to connect in MySQL Database:

```
return array(  
    .....  
    'connectionString' => 'mysql:host=localhost;dbname=testdrive',  
    'emulatePrepare' => true,  
    'username' => 'root',  
    'password' => '',  
    'charset' => 'utf8',  
    .....  
);
```

Gii

- A powerful Web-based code generator


Configuring Gii:

- Edit the file: [WebRoot/yii-app/protected/config/main.php](#)
- Uncomment the Gii module and update the password

```
.....
'import'=>array(
    'application.models.*',
    'application.components.*',
),
'modules'=>array(
    // uncomment the following to enable the Gii tool
    'gii'=>array(
        'class'=>'system.gii.GiiModule',
        'password'=>'Enter Your Password Here',
        // If removed, Gii defaults to localhost only. Edit carefully to taste.
        'ipFilters'=>array('127.0.0.1','::1'),
    ),
),
.....
```

Gii Page

- Visit the URL <http://localhost/yii-app/index.php?r=gii>
- Login page will be prompted for a password

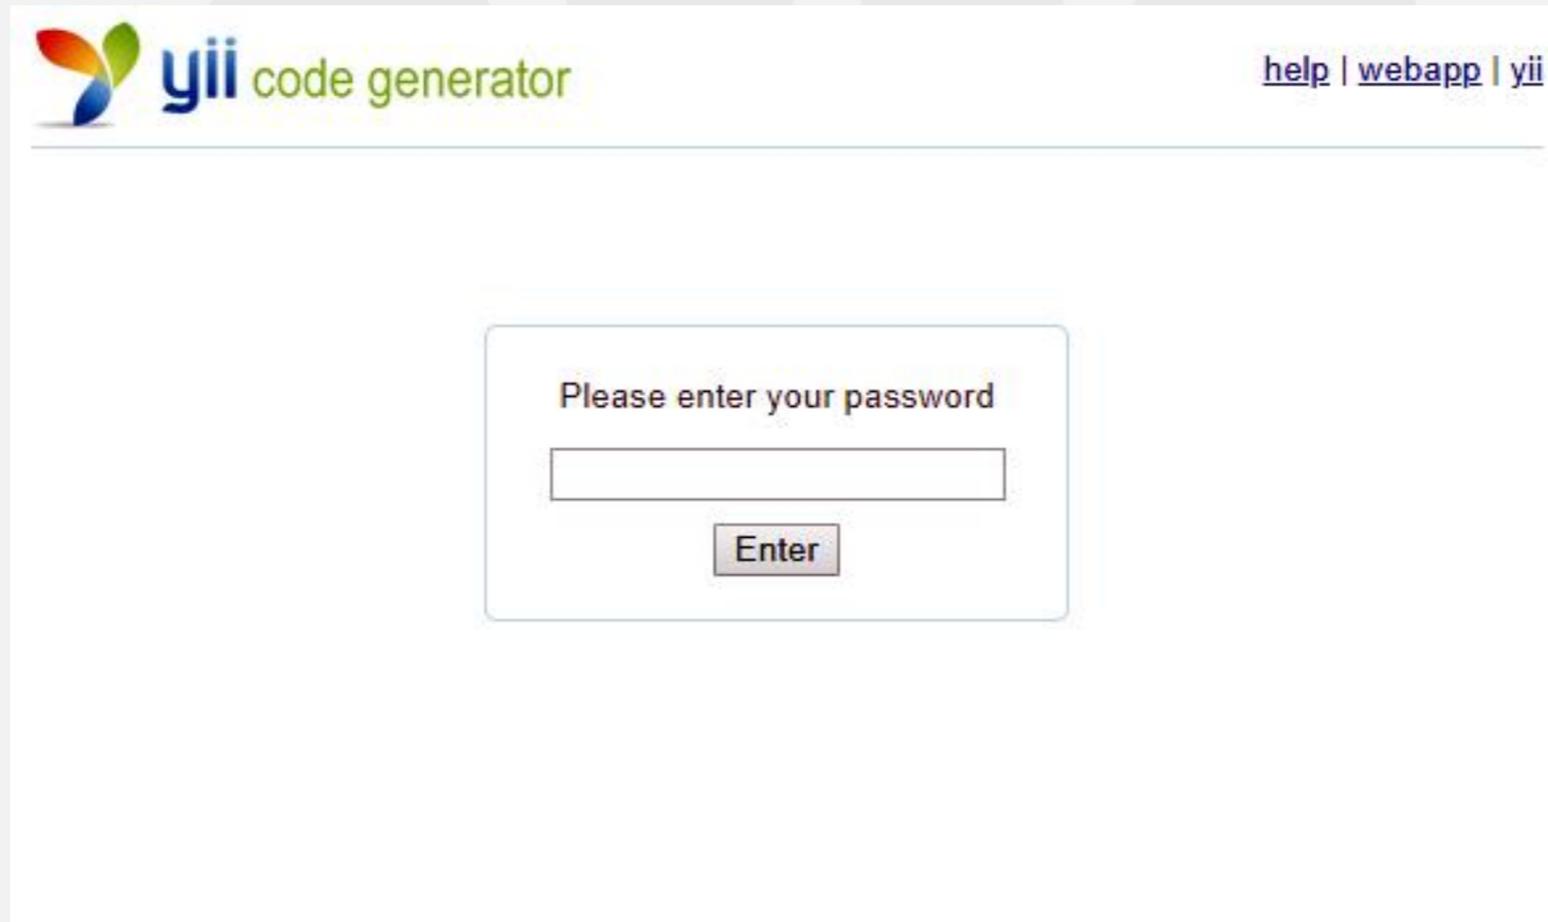

The screenshot shows the Yii Code Generator interface. At the top left is the logo with the text "yii code generator". At the top right are links for "help", "webapp", and "yii". The main content area features a centered box with the text "Please enter your password", a text input field, and an "Enter" button.

Generating the User Model

- After login, click on the link [Model Generator](#).
- This will bring us to the following model generation page.

Model Generator

This generator generates a model class for the specified database table.

Fields with * are required. Click on the highlighted fields to edit them.

Database Connection *

db

Table Prefix

[empty]

Table Name *

Model Class *

Base Class *

CActiveRecord

Model Path *

application.models

Build Relations

Use Column Comments as Attribute Labels

Code Template *

default (C:\inetpub\wwwroot\yii-app\yii\framework\gii\generators\model\templates\default)

Preview

Generating the User Model

Enter the following values to generate model file:

- Table Name: `tbl_user`
- Model Class: `User`
- Press the `Preview` button

This will show us the new code file to be generated

- Press the `Generate` button

A new file named `User.php` will be generated under `protected/models`

This User model class allows us to talk to the underlying database `tbl_user` table in an object-oriented fashion.

Generating User CRUD Code

- In Gii page, click on the link [Crud Generator](#).
- Generate the code that implements the CRUD operations

Crud Generator

This generator generates a controller and views that implement CRUD operations for the specified data model.

Fields with * are required. Click on the **highlighted fields** to edit them.

Model Class *

Controller ID *

Base Controller Class *

Controller

Code Template *

default (C:\inetpub\wwwroot\yii-app\yii\framework\gii\generators\crud\templates\default)

Preview

Generating User CRUD Code

Enter the following values to generate CRUD files:

- Model Class: [User](#)
- Controller ID: [user](#) (in lower case)
- Press the [Preview](#) button

This will show us the new code files to be generated

- Press the [Generate](#) button

A new file named [UserController.php](#) will be generated under [protected/controllers](#)

And, view files under [protected/views/user](#) used for the front-end

Accessing User CRUD Pages

- Visit the URL <http://localhost/yii-app/index.php?r=user>
- This will display a list of user entries in the `tbl_user` table.

Pages Access Rules

- [Allow all users \(*\)](#) - List User, View User
- [Allow authenticated user \(@\)](#) - Create User, Update User
- [Allow admin user \(admin\)](#) - Manage User, Delete User

Controller Access Control Rules

- WebRoot/yii-app/protected/controllers/UserController.php

```
/**
 * Specifies the access control rules.
 * This method is used by the 'accessControl' filter.
 * @return array access control rules
 */
public function accessRules()
{
    return array(
        array('allow', // allow all users to perform 'index' and 'view' actions
            'actions'=>array('index','view'),
            'users'=>array('*'),
        ),
        array('allow', // allow authenticated user to perform 'create' and 'update' actions
            'actions'=>array('create','update'),
            'users'=>array('@'),
        ),
        array('allow', // allow admin user to perform 'admin' and 'delete' actions
            'actions'=>array('admin','delete'),
            'users'=>array('admin'),
        ),
        array('deny', // deny all users
            'users'=>array('*'),
        ),
    );
}
```

Bootstrap

Bootstrap is the most popular **CSS Framework** for developing responsive and mobile-first websites.

Advantages

- Ensure cross-browser compatibility
- Allow website to adapt in various screen sizes – mobile and desktop
- Add consistency to design and code between projects and between developers

Disadvantage

- Lot of requirements to style overrides or rewriting the files tends for customization of design used in Bootstrap.

Install Bootstrap Extension in Yii

- Download bootstrap extension from this [link](#).
- Unpack the file archive to [WebRoot/yii-app/protected/extensions](#).

Configuring Extension:

- Edit the file: [WebRoot/yii-app/protected/config/main.php](#)

In editor, add the following line of code before starting of array:

```
Yii::setPathOfAlias('bootstrap', dirname(__FILE__).'../extensions/bootstrap');
```

```
.....  
Yii::setPathOfAlias('bootstrap', dirname(__FILE__).'../extensions/bootstrap');  
  
return array(  
.....
```

Install Bootstrap Extension in Yii

- Edit the file: [WebRoot/yii-app/protected/config/main.php](#)

In editor, add the following line of code:

```
return array(  
    'basePath' => dirname(__FILE__).DIRECTORY_SEPARATOR.'..',  
    'name' => 'My Web Application',  
    'theme' => 'bootstrap',  
    // preloading 'log' component  
    'preload' => array('log'),  
    // ...  
);
```

In editor, add the following line of codes inside Gii module:

```
.....  
'modules' => array(  
    // uncomment the following to enable the Gii tool  
    'gii' => array(  
        'class' => 'system.gii.GiiModule',  
        'password' => 'pass',  
        // If removed, Gii defaults to localhost only. Edit carefully to taste.  
        'ipFilters' => array('127.0.0.1','::1'),  
        'generatorPaths' => array(  
            'bootstrap.gii',  
        ),  
    ),  
),  
),  
.....
```

Install Bootstrap Extension in Yii

- Edit the file: [WebRoot/yii-app/protected/config/main.php](#)

In editor, add the following line of codes inside the components:

```
// application components
'components' => array(
    .....
    'bootstrap' => array(
        'class' => 'bootstrap.components.Bootstrap',
    ),
    .....
),
```

Install Bootstrap Extension in Yii

- Edit the file: [WebRoot/yii-app/protected/extensions/bootstrap/components/Bootstrap.php](#)

In editor, add the following line of codes inside the class:

```
.....  
public function init() {  
    $this->registerAllCss();  
    $this->registerJs();  
    parent::init();  
}  
.....
```

Install Bootstrap Extension in Yii

- Edit the file: [WebRoot/yii-app/protected/views/layout/main.php](#)

In editor, add the following line of code before the `<html>` tag:

```
<?php echo Yii::app()->bootstrap->init();?>
```

```
<?php /* @var $this Controller */ ?>
```

```
<!DOCTYPE html>
```

```
<html>
```


```
<head>
```

```
    <meta http-equiv="Content-Type" content="text/html; charset=utf-8">
```

```
    <meta name="language" content="en">
```

Install Bootstrap Extension in Yii

- Default classic template:

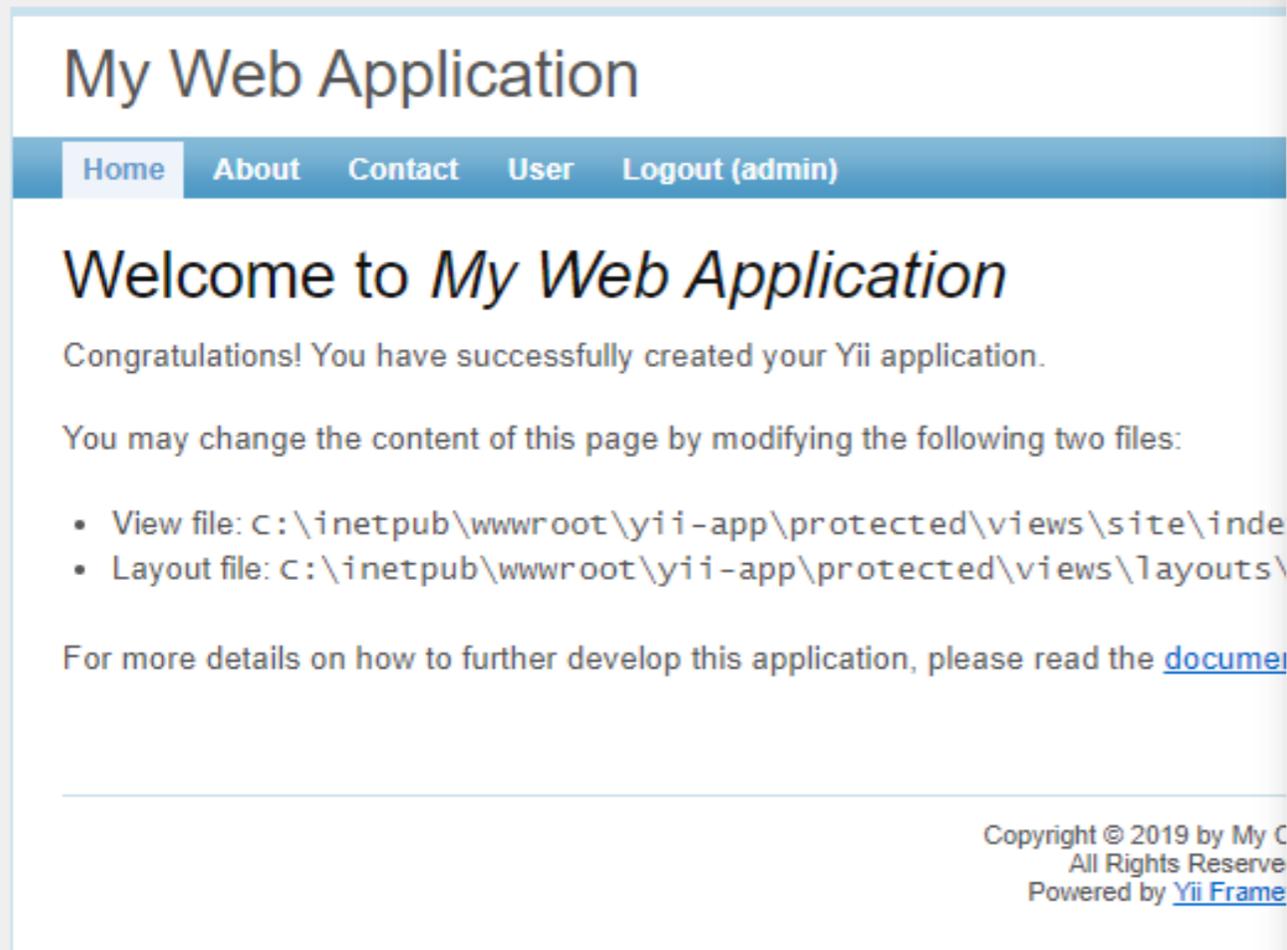

The screenshot shows a web application interface with a blue header and navigation menu. The main content area contains a welcome message and instructions for modifying the application. The footer includes copyright information and a link to the documentation.

My Web Application

Home About Contact User Logout (admin)

Welcome to *My Web Application*


Congratulations! You have successfully created your Yii application.

You may change the content of this page by modifying the following two files:

- View file: `C:\inetpub\wwwroot\yii-app\protected\views\site\index.php`
- Layout file: `C:\inetpub\wwwroot\yii-app\protected\views\layouts\main.php`

For more details on how to further develop this application, please read the [documentation](#).

Copyright © 2019 by My C
All Rights Reserve
Powered by [Yii Frame](#)

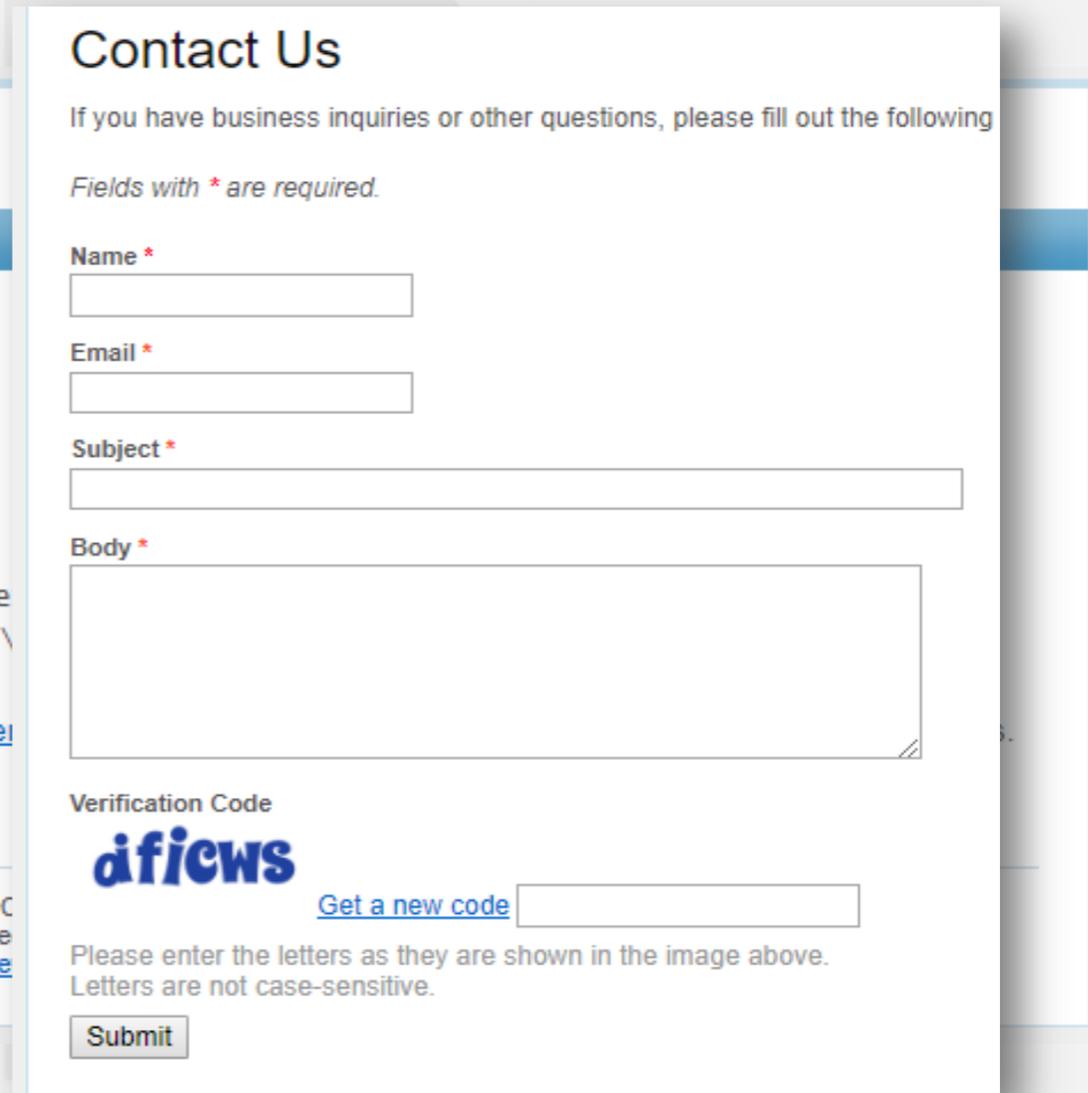

The screenshot shows a 'Contact Us' form with a white background and a blue header. The form includes fields for Name, Email, Subject, and Body, along with a CAPTCHA verification code. A 'Submit' button is located at the bottom.

Contact Us

If you have business inquiries or other questions, please fill out the following

*Fields with * are required.*

Name *

Email *

Subject *

Body *

Verification Code

aficws [Get a new code](#)

Please enter the letters as they are shown in the image above.
Letters are not case-sensitive.

Submit

Install Bootstrap Extension in Yii

- Bootstrap template:

The image shows two overlapping screenshots of a web application. The background screenshot is the 'My Web Application' page, which has a blue header with navigation links: Home, About, Contact, User, and Logout (admin). The main content area features a large heading 'Welcome to My Web Application' and a message: 'Congratulations! You have successfully created your Yii application. You may change the content of this page by modifying the following two files: View file: C:\inetpub\wwwroot\yii-app\protected\views\site\index.php, Layout file: C:\inetpub\wwwroot\yii-app\protected\views\layouts\main.php'. At the bottom, it says 'Copyright © 2019 by My Company. All Rights Reserved. Powered by Yii Framework.' The foreground screenshot is a 'Contact Us' form with the following fields: Name *, Email *, Subject *, and Body *. Below the form is a 'Verification Code' section with a CAPTCHA image showing the word 'oifcws' and a 'Get a new code' button. A 'Submit' button is at the bottom of the form.

Bootstrap Generator

- Bootstrap Generator creates CRUD using bootstrap widgets



Welcome to Yii Code Generator!

You may use the following generators to quickly build up your Yii application:

- [Controller Generator](#)
- [Crud Generator](#)
- [Form Generator](#)
- [Model Generator](#)
- [Module Generator](#)
- [Bootstrap Generator](#)

GridView Widget

Default

Manage Users

You may optionally enter a comparison operator (<, <=, >, >=, <> or =) at the beginning of each of your search values to specify how the comparison should be done.

[Advanced Search](#)

Displaying 1-10 of 22 results.

ID	Username	Password	Email	
1	test1	pass1	test1@example.com	  
2	test2	pass2	test2@example.com	  
3	test3	pass3	test3@example.com	  
4	test4	pass4	test4@example.com	  
5	test5	pass5	test5@example.com	  
6	test6	pass6	test6@example.com	  
7	test7	pass7	test7@example.com	  
8	test8	pass8	test8@example.com	  
9	test9	pass9	test9@example.com	  
10	test10	pass10	test10@example.com	  

Go to page: [< Previous](#) [1](#) [2](#) [3](#) [Next >](#)

Bootstrap

Manage Users

You may optionally enter a comparison operator (<, <=, >, >=, <> or =) at the beginning of each of your search values to specify how the comparison should be done.

[Advanced Search](#)

Displaying 1-10 of 22 results.

ID	Username	Password	Email	
1	test1	pass1	test1@example.com	  
2	test2	pass2	test2@example.com	  
3	test3	pass3	test3@example.com	  
4	test4	pass4	test4@example.com	  
5	test5	pass5	test5@example.com	  
6	test6	pass6	test6@example.com	  
7	test7	pass7	test7@example.com	  
8	test8	pass8	test8@example.com	  
9	test9	pass9	test9@example.com	  
10	test10	pass10	test10@example.com	  

[←](#) [1](#) [2](#) [3](#) [→](#)

Widget

- Difference between default widget and bootstrap widget

Default Widget

```
<?php $this->widget('zii.widgets.grid.CGridView', array(
    'id' => 'user-grid',
    'dataProvider' => $model->search(),
    'filter' => $model,
    'columns' => array(
        'id',
        'username',
        'password',
        'email',
        array(
            'class' => 'CButtonColumn',
        ),
    ),
)); ?>
```

Bootstrap Widget

```
<?php $this->widget('bootstrap.widgets.TbGridView', array(
    'id' => 'user-grid',
    'dataProvider' => $model->search(),
    'filter' => $model,
    'columns' => array(
        'id',
        'username',
        'password',
        'email',
        array(
            'class' => 'bootstrap.widgets.TbButtonColumn',
        ),
    ),
)); ?>
```

Connect it to GitHub

- **GitHub** is a Git repository hosting service.
- **Git** is a command line tool while **GitHub** provides a Web-based graphical interface.

Start a new git repository:

- Go to github.com.
- Log in to your account.
- Click the [new repository](#) button in the top-right. You'll have an option there to initialize the repository with a README file.
- Click the [“Create repository”](#) button.

Git Push


- Open a [Git Bash](#) or a [Command-Line](#) in this directory [WebRoot/yii-app](#)
- Follow this set of instructions to “[Push an existing repository](#)” to GitHub

```
git init
git remote add origin https://github.com/<username>/yii-app.git
git add .
git commit -m "first commit"
git push -u origin master
```

- Visit the URL <https://github.com/<username>/yii-app> to view the code repository

Exercise

- Create **“Message”** System

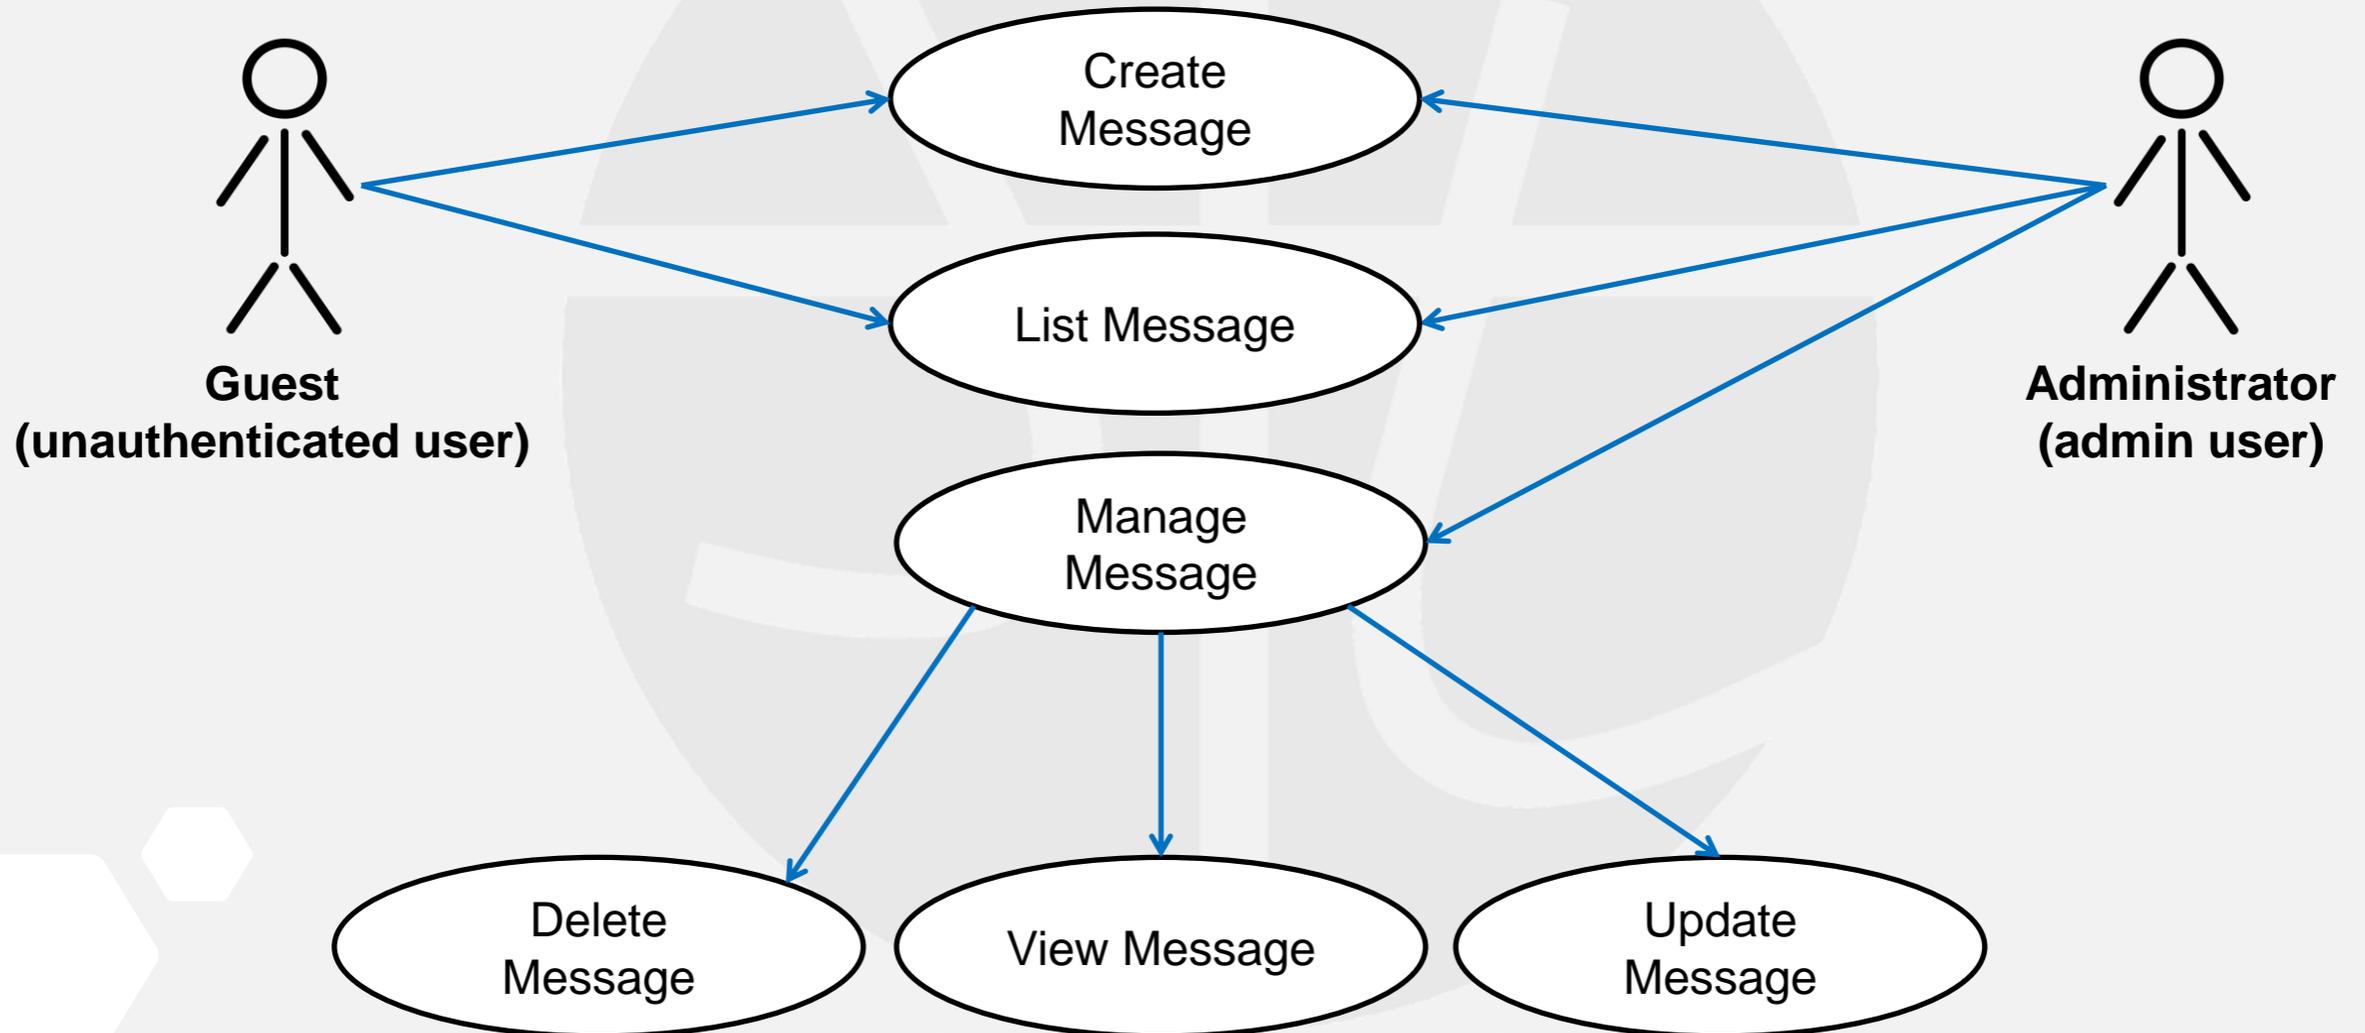

Exercise

Guest

- Can **create** a message
- Can **view** list of message

Administrator

- Can **create** a message
- Can **view** list of message
- Can **manage** list of message
- Can **update** message
- Can **delete** message